

# PG 500 MODIFIED CEMENT

## PRODUCT DESCRIPTION

PG500 is a high quality formulation suitable for use as a cold-applied bonding agent for SBS roofing systems as well as various other membrane systems. PG 500 has a heavy, "trowel-grade" consistency which makes it ideal for flashing details, attachment of membrane to steep slopes and parapet walls and a variety of waterproofing repairs. Its flexibility and elasticity make it superior to standard plastic cements especially where there are moving joints.

## USES

- For applying SBS modified bitumen membrane flashing to parapet walls, curbs and roof penetrations.
- For sealing lap seams and perimeter edges of SBS modified bitumen membranes.
- This product may be used as a topical application on smooth or granule APP products for roofing repairs only.
- For repairing splits, breaks and small holes in asphalt-based roofings and flashings.
- For installing metal edge flanges and other metal joints.
- Positive – side damp proofing of concrete, masonry walls and foundations.
- Not recommended for use with thermoplastic or thermoset membranes

## FEATURES AND BENEFITS

- High flexibility to accommodate temperature-related expansion and contraction of the roof system.
- Great bonding strength
- Provides exceptional weathering characteristics over a wide range of challenging temperatures and weather conditions. Will not mudcrack and will remain highly flexible, resilient and durable through all seasons
- Eliminates the need for kettles and torches
- Interlocking fiber matrix assures uniform, excellent adhesion
- When used on a vertical surface at high temperatures, exhibits excellent flow resistance.
- Non-destructive to asphalt based roofing membranes.
- Asbestos free – 100% recycled cellulose fibers


## TYPICAL PHYSICAL PROPERTIES

TEST PROPERTY	TEST VALUE	TEST PROCEDURE
Weight/gal (lb)	9.0 - 9.5	ASTM D 2939
Cone Penetration (dmm)	245 - 330	ASTM D 312
Flash Point (F)	>105 °F	PMCC
VOC (gm/L)	<300	Std method
Pliability @ 32 °F	pass	ASTM D 6511
Sag @ 140 °F	pass	ASTM D 6511
Solids Weight (%)	>70	ASTM D 1644

## APPLICATION INSTRUCTIONS

### Surface Preparation:

- Surfaces to receive coating must be clean, dry and free from any foreign matter such as dirt, oils, grease or other debris that could inhibit the adhesion capabilities of the newly installed products. Priming is recommended when adhering to questionable conditions.
- On existing roofs, inspect roof substrate condition. Blisters, buckles, and raised edges should be cut out and repaired for a smooth surface.

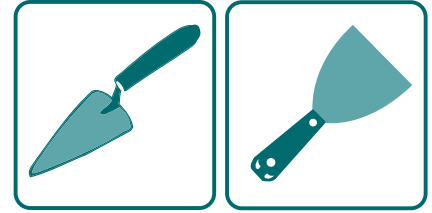

## APPLICABLE STANDARDS

- Miami Dade County Approved
- Meets or exceeds the requirements of ASTM D 4586 Asphalt Roof Cement Type I



## PACKAGING

10.1 oz (0.3 Liters) Cartridge

4.75 Gallon (18.0 Liters) Pail

## POLYGLASS U.S.A., INC. MANUFACTURING FACILITIES

- Fernley, NV
- Hazleton, PA
- Winter Haven, FL

## CORPORATE HEADQUARTERS

Polyglass U.S.A., Inc.  
1111 West Newport Center Drive  
Deerfield Beach, FL 33442  
www.polyglass.com

General Line: (888) 410-1375  
(954) 233-1330

Customer Service: (800) 222-9782

Technical Service: (866) 802-8017

Questions? [pgmarketing@polyglass.com](mailto:pgmarketing@polyglass.com)



*Adds value!*

# PG 500 MODIFIED CEMENT

- Check all flashings, edges, drains, valleys and vents and repair as needed.
- Do not use on wet or damp surfaces, directly over wood or on surfaces previously covered with coal tar based products.

## Application:

- *Application Rate:* Apply 1/8" coat (approximately eight gallons per square) depending on ambient temperature, surface porosity, as well as applicator and/or application technique.
- *Application Method:* Use pointed trowel or wide-edged putty knife to apply cement evenly and in equal amounts to substrate and flashing. Coat should be 1/8" thick, without gaps, dry areas or bubbles.
- *Membrane Flashing:* Coat underside of membrane with cement at rate indicated. No cure time required before flashing installation, simply press into place with even pressure, smoothing out wrinkles and bubbles. Roll all side and end laps, making sure a sufficient amount of product is applied to the laps so that a bead is visible at all lap edges. Mechanically fasten membrane flashings to parapet walls to avoid membrane slippage.
- *Coursing:* Apply cement to surface and install fabric or webbing into cement, then apply a final course of cement. *Metal:* Set metal flashings in full 1/8" bead. Apply product between joints and apply pressure so that bead is visible at joint edge.
- *Sealing/Repairs:* Apply cement at a thickness of 1/8" to 1/4" working the product into the opening or crack and spread two inches beyond repair area at minimum. Embed glass or cotton fabric into the cement for added reinforcement, then cover with additional cement.
- Best suited when ambient temperatures are 45° F and rising. Cold weather will cause product to stiffen, making application more difficult.
- Do not heat exterior of container or attempt to thin this product. Not recommended for application on substrates that exceed 140° F.
- To greatly extend the life of the roof cement, it is recommended that the applicator apply a Polyglass Aluminum roof coating after a minimum of 30 days cure time.

## Limitations:

- Do not use on TPO, EPDM, PVC, or other single ply membranes.
- Not to be installed over or under polystyrene insulation.
- Do not use this product under any APP or any torch products with burn off film.

## Storage and Cleaning:

- Product shelf life: 24 months from date of manufacture when properly stored.
- Store unopened container 24 hours at room temperature prior to application.
- Observe normal safeguards for storing and handling of this product prior to and during application.
- Keep containers covered when not in use.
- Clean equipment and contaminated surfaces with kerosene or mineral spirits.
- Clean hands with waterless hand cleaner.

## WARNING

**Combustible Liquid and Vapor** - Contains petroleum distillate. Harmful or fatal if swallowed. Vapor harmful. May affect the brain or central nervous system causing dizziness, headache, or nausea. Causes nose and throat irritation. Causes eye and skin irritation. Reports have associated repeated and prolonged occupational exposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling contents may be harmful or fatal. Keep away from heat and open flame.

**Personal Protection** - Irritation may result from prolonged or repeated contact with skin. Wear chemical resistant gloves, protective goggles and protective clothing, if needed.

**Eye Contact** - Rinse immediately with clean water for 15 minutes and seek medical advice.

**Waste Disposal** - Empty containers must be disposed of in accordance with local, state and federal regulations.

**For Professional Use Only** - Keep out of the reach of children

**For Exterior Use Only**

Refer to material safety data sheet (MSDS) for specific data and handling of our products.

All data furnished refers to standard production using manufacturing testing tolerances. The product user, and not Polyglass, is responsible for determining the suitability and compatibility of our products for the user's intended use.



*Adds value!*

For the most current product data and warranty information, visit [www.polyglass.com](http://www.polyglass.com)